


Both mandatory efficiency targets are met

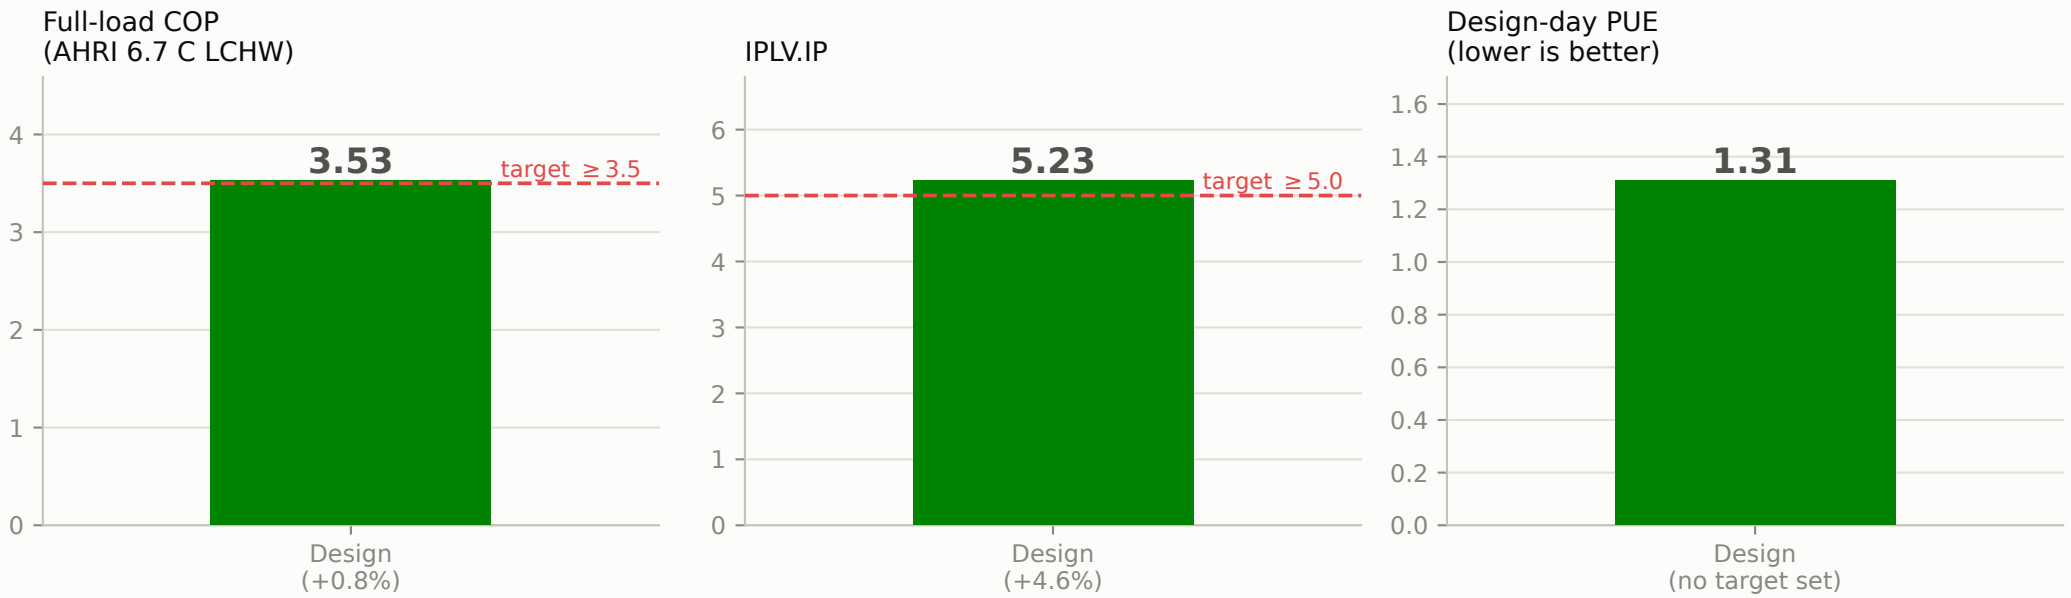

Full-load COP is computed at the strict AHRI 550/590-2023 rating point (6.7 C LCHW, 35 C entering air); at the project's own 15 C design point the COP is 4.67. The COP margin is thin -- 0.8% -- and rests on the vendor confirmations listed in Suggestions for Improvement.