


Why a ventilated machinery room is mandatory, not optional

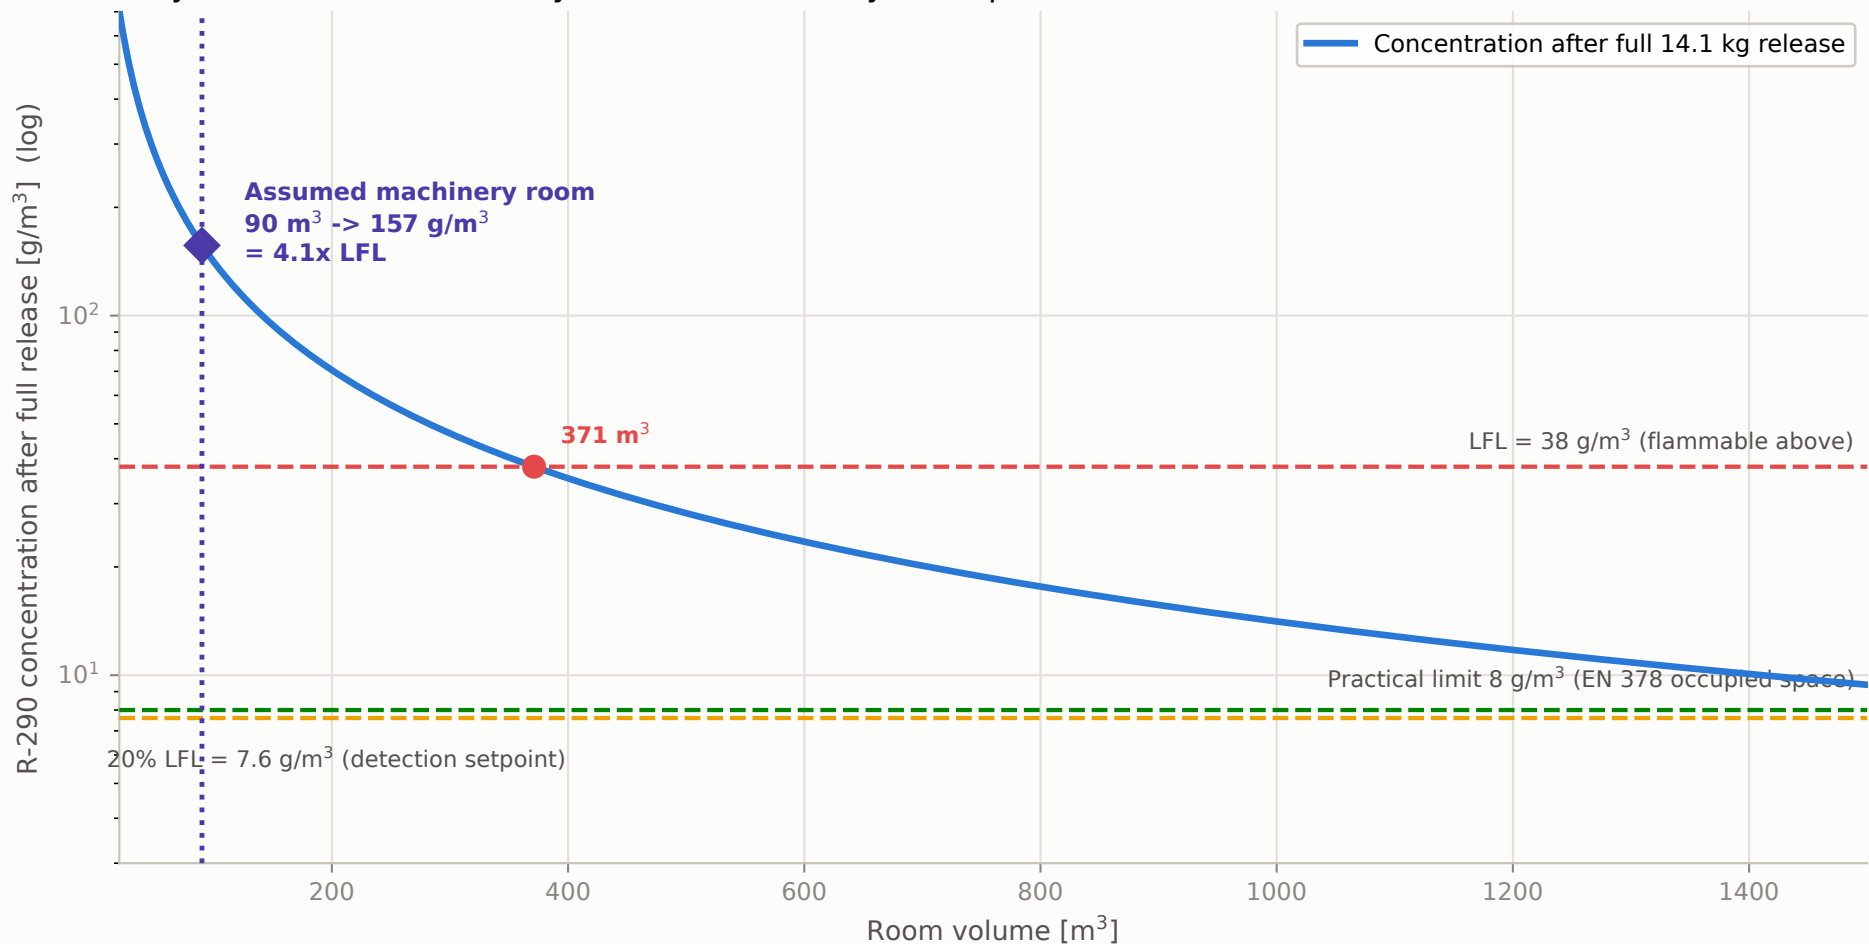

A realistically sized plant room sits far above the LFL on a full release. Compliance therefore rests on EN 378 machinery-room provisions --- leak detection at 20% LFL plus emergency ventilation --- not on dilution by room volume.